FIXTURE SCHEDULE

FIXTURES SHALL BE FURNISHED & INSTALLED COMPLETE W/ ALL ACCESSORIES TO MEET JOB CONDITIONS

MOUNTING	LAMPS NO.	LAMPS TYPE	FIXT. TYPE	MANUFACTURER	CAT. NO.	REMARKS
CEILING SURFACE	1	60W A19	C1	ARROW HART	111	
CEILING SURFACE	1	60W A19	C2	ARROW HART	7581	
CEILING SURFACE	2	20TC6 1/2	EC1	SURE LITES	CA-R-2C-T	ARROWS AS INDICATED
CEILING SURFACE	2	20TC6 1/2	EC2	SURE LITES	CA-R-C-T	ARROWS AS INDICATED
WALL	2	20TC6 1/2	EW1	SURE LITES	CA-R-2-S	
CEILING SURFACE	2	F40WW	FC1	METALUX		
CEILING SURFACE	2	F40WW	FC2	METALUX	65-240	
CEILING SURFACE	4	F40WW	FC3	METALUX	2M-440A	
CEILING SURFACE	1	F18TT	FC4	PRESCOLITE	9424-15	
CEILING RECESSED	3	F40WW	FR1	METALUX	2GS-640A	
CEILING RECESSED	2	F40WW	FR2	METALUX	GS-240A	
CEILING SUSPENDED	2	F40WW	FS1	METALUX	65-240	
WALL	4	F40WW	FW1	LITE CONTROL	85N48-S-G-120V	
WALL	4	F80WW	FW2	LITE CONTROL	85N48-S-G-120V	
WALL	2	F40WW	FW3	LITE CONTROL	85N24-S-G-120V	
CEILING RECESSED	1	150W A21	R1	LIGHTOLIER	7059	
CEILING RECESSED	1	75W A19	R2	LIGHTOLIER	7057	
CEILING SUSP.	1	100W OCC.	S1	HOLOPHANE	33208T	
WALL SURFACE	1	100W A19	W1	LIGHTOLIER	4802	
WALL MOUNTED	1	60W A19	W2	ARROW HART	111	
" "	1	100W	W3	STURDY LANTERN	CA 1318	
WALL SURFACE	2	200-EW-BW	WE1	E.L.B.	K-R04-2	



TELEPHONE RISER DIAGRAM

N.T.S.

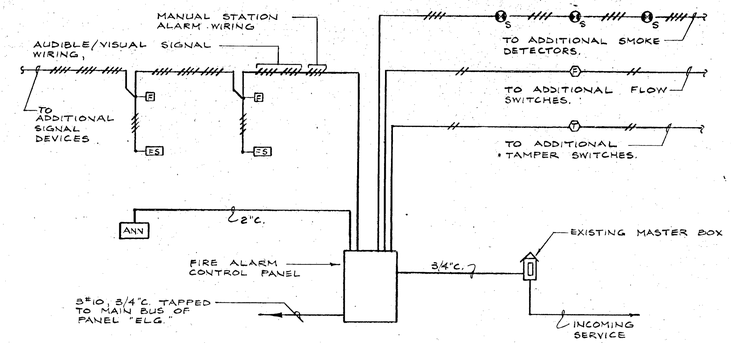

FIRE ALARM SYSTEM TYPICAL WIRING DIAGRAM

N.T.S.

FIRE ALARM SYSTEM NOTES:

1. RISER DIAGRAM IS SHOWN FOR REFERENCE ONLY. EXACT WIRING METHODS & EXACT QUANTITIES SHALL BE AS PER EQUIPMENT MANUFACTURERS APPROVED WIRING DIAGRAMS.
2. MINIMUM SIZE CONDUIT SHALL BE 3/4", LARGER IF REQUIRED.
3. REFER TO FLOOR PLANS FOR LOCATIONS.

FIRE ALARM ANNUNCIATOR SCHEDULE

ZONE NO.	ENGRAVED NAMEPLATE DESCRIPTION
1	GROUND FLOOR
2	FIRST FLOOR
3	SECOND FLOOR
4	MEZZANINE LEVEL
5	BALCONY LEVEL
6	SPRINKLER MAIN
7	SPARE
8	SPARE

DISTRIBUTION PANEL SCHEDULE

ITEM NO.	CIRCUIT BREAKER POLES	TRIP	FRAME					FEEDER COND.	WIRE	GROUND WIRE	FOR NO.	EQUIPMENT	NAMEPLATE
												120/208V. 3Ø 4W. 600A. MLO	
1	3	100						1 1/2	4#2	1#8	1	PANEL LLG	PANEL LLG
2	3	60						1 1/4	4#4	1#10	2	PANEL PLG	PANEL PLG
3	3	175						2	3#1/0	1#6	3	ELEVATOR	ELEVATOR
4	3	200						2	4#3/0	1#6	4	AUTO TRANSF. SWITCH	AUTO TRANSF. SWITCH
5	3	100						1 1/2	4#2	1#8	5	PANEL PL1	PANEL PL1
6	3	60						1 1/4	4#4	1#10	6	PANEL PL2	PANEL PL2
7	2	80						1 1/4	3#4	#10	7	EXISTING LOADCENTER	EXISTING LOADCENTER
8	3	100										SPARE	SPARE
9	3	100										SPARE	SPARE
10	3	–										SPACE & HDWR.	SPACE & HDWR.
11	3	–											
12	3	–											

PANELBOARD SCHEDULE

SEE NOTE	FOR NO.	FEEDER COND.	WIRE	GROUND WIRE	TYPE TRIP	PANEL NO.	CIRCUIT BREAKERS TOTAL BKRS	TOTAL POLES	1P 20A	1P 20A	3P 20A	2P 30A	3P 30A	1P SPACE & HDWR.
	SEE	DISTR.	SCHED.		3	LLG	36	42	36			1		5
					3	PLG	20	30	18				2	3
					3	PL1	E1	42	18		7	1		5
					3	PL2	24	24	24					–
	E1	1 1/2	4#2	1#8	3	ELG	38	42	38					4
	E2	1 1/4	4#4	1#10	3	EL2	12	24	12					–

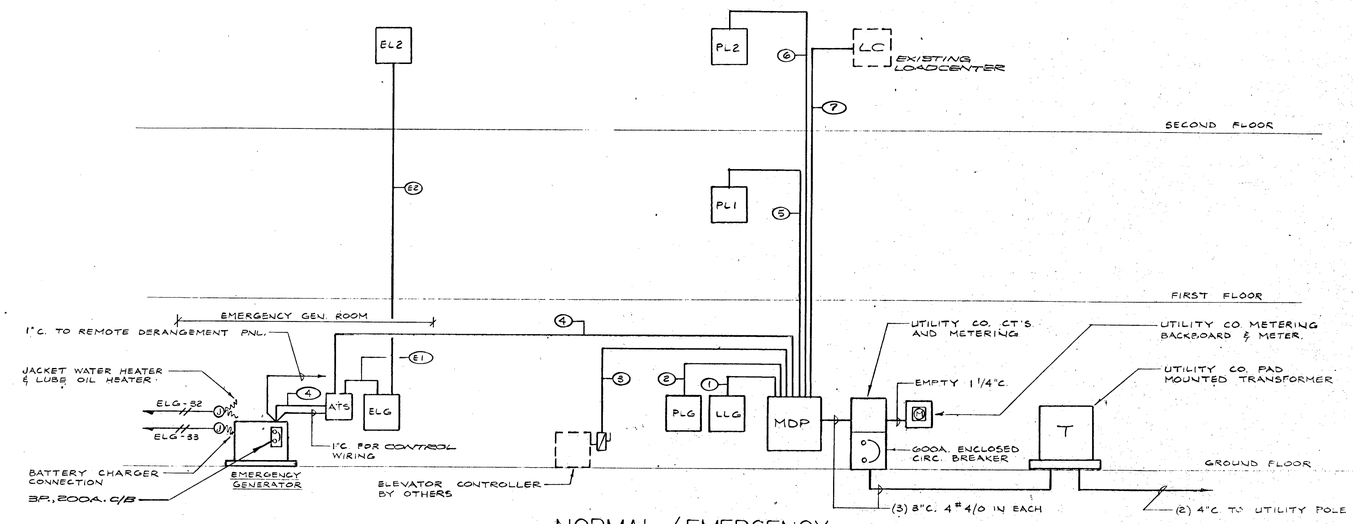

NORMAL / EMERGENCY POWER RISER DIAGRAM

N.T.S.

LOTTERO & MASON ASSOCIATES, INC.
Consulting Engineers
132 LINCOLN STREET
BOSTON, MA 02111

E/a. 3/31/87

Additions and Renovations to
THE ACTON TOWN HALL
Acton, Massachusetts

title: ELECTRIC RISERS & SCHEDULES

ROBERT G. NEILEY ARCHITECTS
286 Congress Street, Boston, MA 02210

drawn by A.D. | job | scale NONE | date 4-6-87

drawing E-5