

SITE PLAN

SCALE: 1" = 20'

NOTE


1. CONTRACTOR SHALL PROVIDE BYPASS PUMPING AS NECESSARY TO COMPLETE TRANSFER OF WASTEWATER FLOWS FROM EXISTING PUMP STATION TO NEW PUMP STATION.

DEMOLITION PLAN

SCALE: 1" = 20'

DEMOLITION NOTES

1. CONTRACTOR SHALL PROTECT ALL EXISTING UTILITIES IN PERFORMING DEMOLITION WORK.
2. CONTRACTOR SHALL MAINTAIN SEWER SERVICE THROUGHOUT CONSTRUCTION WITHOUT INTERRUPTION IN SERVICE. CONTRACTOR SHALL PROVIDE ALL NECESSARY EQUIPMENT REQUIRED TO MAINTAIN SEWER SERVICE AT NO ADDITIONAL COST TO THE OWNER, INCLUDING PORTABLE GENERATOR IN THE EVENT OF A POWER OUTAGE AT THE EXISTING PUMP STATION IN ORDER TO MAINTAIN SEWER SERVICE.
3. EXISTING PUMP STATION WETWELL SHALL BE ABANDONED BY PERFORMING THE FOLLOWING:
 - A. PUMP OUT AND LEGALLY DISPOSE OF THE MATERIAL WITHIN WETWELL.
 - B. PUNCTURE SIX (6) 3-INCH DIAMETER HOLES IN THE BOTTOM OF THE CONCRETE WETWELL.
 - C. DEMOLISH THE TOP 3 FEET OF CONCRETE WETWELL AND LEGALLY DISPOSE OF ALL DEBRIS.
 - D. BACKFILL REMAINING VOIDS WITH COMMON FILL AND COMPACT IN PLACE.
 - E. RESTORE SURFACE AREA TO PRECONSTRUCTION CONDITIONS, GRADE, LOAM AND SEED SURFACE AREA.
4. EXISTING PUMP STATION DRYWELL SHALL BE ABANDONED BY PERFORMING THE FOLLOWING:
 - A. REMOVE AND LEGALLY DISPOSE OF THE MATERIAL WITHIN DRYWELL, INCLUDING BUT NOT LIMITED TO ALL PIPING, PUMPS, VALVES, ELECTRICAL AND MECHANICAL EQUIPMENT.
 - B. PUNCTURE SIX (6) 3-INCH DIAMETER HOLES IN THE BOTTOM OF THE STEEL DRYWELL.
 - C. DEMOLISH THE TOP 3 FEET OF STEEL DRYWELL AND LEGALLY DISPOSE OF ALL DEBRIS.
 - D. BACKFILL REMAINING VOIDS WITH COMMON FILL AND COMPACT IN PLACE.
 - E. RESTORE SURFACE AREA TO PRECONSTRUCTION CONDITIONS, GRADE, LOAM AND SEED SURFACE AREA.
5. WETWELL SHALL BE PUMPED OUT BY A SEPTAGE HAULER LICENSED IN THE TOWN OF ACTON.
6. AT OWNERS DISCRETION, PRIOR TO ABANDONING EXISTING DRYWELL AND WETWELL, CONTRACTOR SHALL REMOVE AND STOCKPILE ANY AND ALL EQUIPMENT AT A LOCATION TO BE DETERMINED BY OWNER. OTHERWISE, CONTRACTOR SHALL REMOVE AND LEGALLY DISPOSE OF ANY UNWANTED EQUIPMENT.
7. THE HANDLING, REMOVAL AND DISPOSAL OF ASBESTOS CEMENT (AC) MATERIALS IS REQUIRED ON THIS PROJECT. STRICTLY ADHERE TO ALL APPLICABLE LOCAL, STATE AND FEDERAL REQUIREMENTS ASSOCIATED WITH ASBESTOS PRODUCTS.

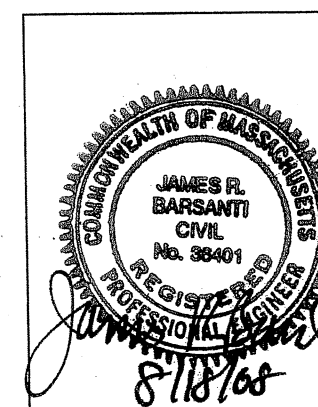

NORTH ACTON TREATMENT CORP.
CLUBHOUSE PUMP STATION NO. 3 REPLACEMENT
NAGOG PARK, ACTON, MASSACHUSETTS

SITE AND DEMOLITION PLANS

PREPARED BY:

PREPARED BY: **EARTH TECH | AECOM**

3300 BAKER AVENUE SUITE 290 CONCORD, MA 01742 1-978-371-4000

DRN BY:		1"=1 INCH		VERIFY SCALE IF PLAN SHEET IS REDUCED	
DWG					
DES BY:					
DWG					
CHK BY:					
BML					
APP BY:					
REV		DESCRIPTION		DRN	DATE (M/D/Y)