Date... May 29, 1992 .....   Permit No.. 92-90

TOWN OF ACTON

APPLICATION FOR PERMIT TO CONSTRUCT WITHIN A PUBLIC WAY

This application must be submitted not less than five (5) days prior to any Construction within a public way.

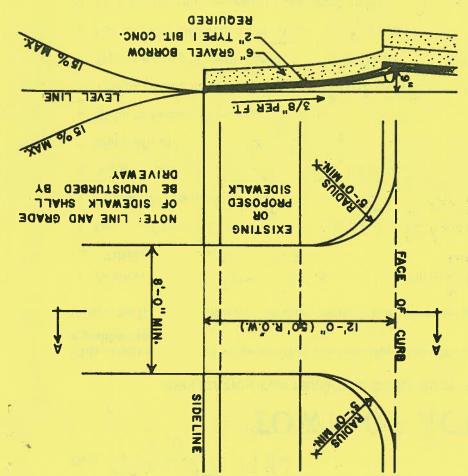**Notice 24 hours in advance of any construction must be given to the Town Engineer.**

1. Permittee:.. Boston Gas .... Address:.. Box 1336 Commonwealth Ave
1A. Telephone #.. 369-4775 ....   West Concord 01742

2. Location of Proposed Construction: ... 154 School ST ....

3. Purpose of Construction: ... Service Cut OFF .....

4. Length of Cut: .. 5 ... a hole ...

5. Width of Cut: ... 4 hole ...

6. Width of Existing Pavement: ... 25 ...

7. Type of Existing Roadway Surface: ... Asphalt .....   Type of Curb:.. — ....

8. Type of Existing Sidewalk Surface: ...... NONC ......   Type of Shoulder: ... SOFT ....

9. Date of Street Opening: From.. June 8, 1992 .....   To.. June 30, 1992 .....

10. For Work Involving Excavations: Dig Safe Number ... 921244401 .....

   I, the undersigned, hereby declare that I have read and agree to the Town of Acton Specifications for Regulating Construction with Public Ways dated August 3, 1982. I have deposited the required bond with the Town of Acton, and I covenant and agree that the Town may deduct from this amount the cost of repairs to the road surface, curbs, shoulders, walls or other features within the right-of-way including replacing bounds if not completed by me to the satisfaction of the Town Engineer within the specified time.

Special Instructions: Signature of Applicant.... John P. Purcell ....

Permit Issued: Date .... 6/1/92 .....   By... Dennis P. Roy ....

Application Denied: Date........   By...........

Work Inspected and Approved: Date ... 10/5/95 .....   By.. Den P. Roy ....

(over)

INO360

SKETCH

TOWN OF ACTON
TYPICAL DRIVEWAY &
TRENCH DETAIL
FEB. 1969   NO SCALE

SECTION A-A

15% MAX.

LEVEL LINE

15% MAX.

2" TYPE I BIT CONC.
REQUIRED

6" GRAVEL BORROW

3/8" PER FT.

9"

NOTE: LINE AND GRADE
OF SIDEWALK SHALL
BE UNDISTURBED BY
DRIVEWAY

EXISTING
OR
PROPOSED
SIDEWALK

RADIUS
5'-0" MIN.

FACE OF CURB

8'-0" MIN.

12'-0" (50' R.O.W.)

SIDELINE

RADIUS
5'-0" MIN.

NOTE: 1. FINAL PATCH DEPTH
3" OIL TREATED ROADS
4" BIT. CONC. ROADS
2. SEE SPECIFICATIONS FOR
FURTHER REQUIREMENTS

UTILITY

COMPACTED APPROVED BACK-
FILL

6" LOAM & SEED

VARIES

VARIES

FINAL PATCH (SEE NOTE)

EXISTING SURFACE

1'   1'

#154 School

154

(2077)

SCHOOL

ACT

OLDE SURREY

DR.

K7-21

K7-22

HILLCREST

AVE.

GIOCONDA

ST.

DR.

(1870)
(1257) 178
(2092) 175
(1878) 177
(1253) 181
(1302)
(345) 86
(1210)
(1206)
(1318)
(1545)
(1517)
(1523)
(1522)
(1544)
(1529)
(1535)
(1519)
(1524)
(1525)

1/2" CU
2"-1967
4"-1350

0   40   80   120   APRIL
                      88